


Characteristic


Parameter	Minimum	Typical	Maximum	Units
Excitation Voltage	0	5.0	10.0	Volts
Excitation Current	0	1.5	2.5	mA
Span (FS Range)				
15 PSIA	65	100	140	mV
30 PSIA	75	100	130	mV
150 PSIA	90	130	180	mV
Offset	-30	0	30	mV
TC Span	-21	-19	-17	%FS/100°C
TC Offset	-7	-1	+7	%FS/100°C
TC Resistance	24	28	32	%FS/100°C
Linearity	-0.4	0.1	+0.4	%FS
Bridge Impedance	3.5	4.5	6.0	KΩ
Pressure Overload	2X			Rated.F.S.
Operating Temp	-20		85	°C
Storage Temp	-30		125	°C

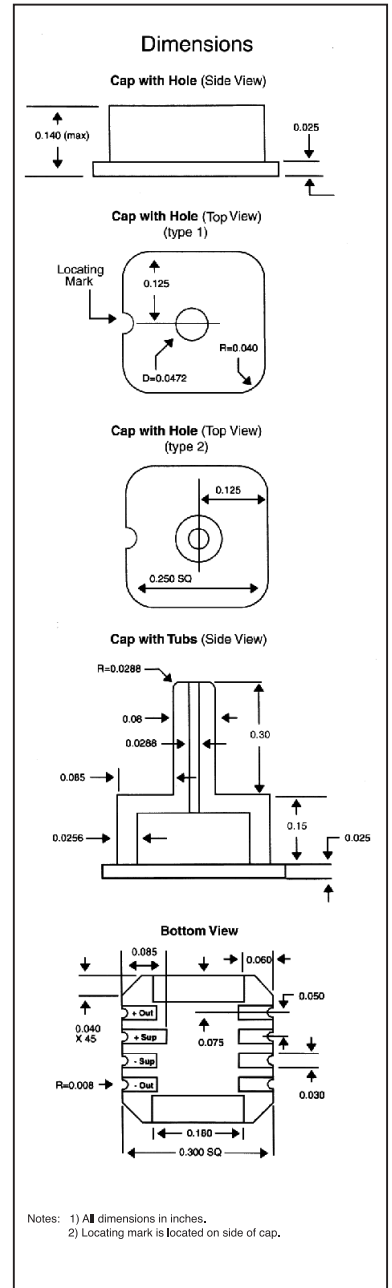

Physical Characteristic

Cap Material	Ryton®
Base Material	Ceramic
Pad Material	Nickel

Ordering Information

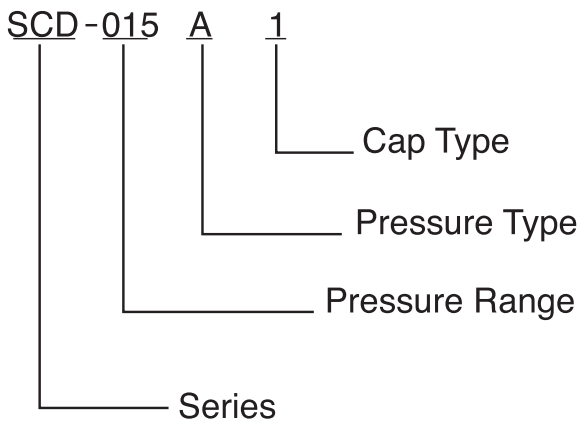

Cap Type

- 1: Cap with hole
- 2: Cap with tube

Cap Type

A: Absolute

Pressure Range

- 015: 15 PSI
- 030: 30 PSI
- 100: 150 PSI



400, Sec. 4, Ting Tsao Rd., Lu-Kang,
 Chang Hua, Taiwan, R.O.C. 505
 TEL: 886 4 7716208
 FAX: 886 4 7715540

Additional Products

- Digital Pressure Meter
- Pressure Transducer